FIXED CALIPER

P4.34 a

20.7850.$^{10}_{20}$ A

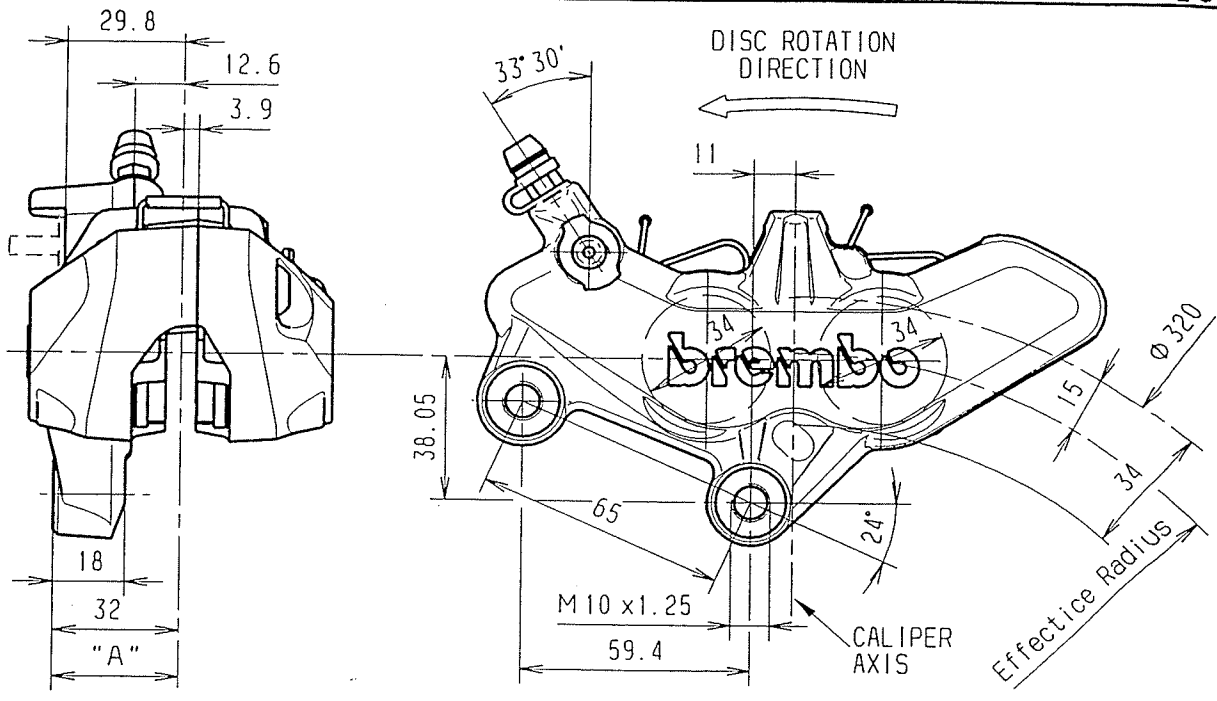

DESCRIPTION

Fixed caliper with 4 opposed pistons, realized by semicalipers joined by bolts.
Construction Material: Aluminium Alloy.
Operating fluid: brake fluid DOT4.

N.B.: Drawing shows left side caliper.
Code 20.7850.10.
Code 20.7850.20 specular.
Mounting side behind the fork.

PADS SHAPE AND DIMENSIONS

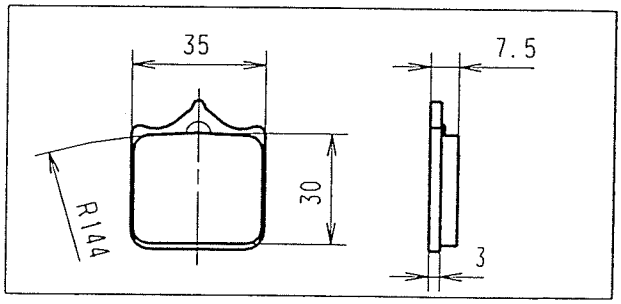

TECHNICAL CHARACTERISTICS

Pistons number and diameter:	4	34 mm
MAX working pressure:		70 bar
"A" Disc position (TOLERANCE):		
Disc thickness 5.0 mm		±0.8 mm
Disc thickness 4.5 mm		±0.8 mm

Average pad surface (1 pad):	9.90 cm^2
Weight (with sintered pad):	0.975 kg

CONFIGURATION

CODE CALIPER / CHARACT.	PADS FRICTION MATERIAL	BODY COLOR	MOUNT. SIDE	USABLE DISCS THICKNESS	BRAKE FLUID FOR PADS WEAR
20.7850.$^{10}_{20}$	TOSHIBA TT 2802 GG	ORO	SX DX	5.0 mm 4.5 mm	14.2 cm^3

AVAILABLE SPARE PARTS

CODE CALIPER / SPARE PARTS	PADS	BLEEDER SCREW	DUST COVER	SPRING PIN
20.7850.$^{10}_{20}$	107.7855.11	105.3387.52	105.1502.20	122.4849.55